

The Hankel-Type L_q/L_p Induced Norms of Positive Systems Across Switching

Y. Ebihara* D. Peaucelle** D. Arzelier**

* Graduate School of Information Science and Electrical Engineering,
Kyushu University, 744 Motoooka, Nishi-ku, Fukuoka 819-0395, Japan
(e-mail: ebihara@ees.kyushu-u.ac.jp).

** LAAS-CNRS, Univ. Toulouse, CNRS, Toulouse, France
(e-mail: peaucelle,arzelier@laas.fr).

Abstract: The Hankel-type L_q/L_p induced norms across a single switching over two linear time-invariant (LTI) positive systems are discussed. The norms are defined as the induced norms from vector-valued L_p -past inputs to vector valued L_q -future outputs across a switching at the time instant zero. The Hankel-type L_2/L_2 induced norm across a single switching for general LTI systems is studied in details to evaluate the performance deterioration caused by switching. Thanks to the strong positivity property, we successfully characterize the Hankel-type L_q/L_p induced norms for the positive system switching even for p, q being 1, 2, ∞ . In particular, we will show that some of them are given in the form of linear program and semidefinite program (SDP). The SDP-based characterizations are useful for the analysis of the Hankel-type L_q/L_p induced norms where the systems of interest are affected by parametric uncertainties.

Keywords: positive system switching, Hankel-type L_q/L_p induced norm, linear programming, semidefinite programming.

1. INTRODUCTION

As the theory of linear time-invariant (LTI) positive systems becomes mature, there has been a growing interest in the analysis and synthesis of switched positive systems. An LTI system is said to be (internally) positive if its state and output are nonnegative for any nonnegative initial state and any nonnegative input [Farina and Rinaldi [2000]]. The studies on switched positive systems originate from the stability and the stabilizability analysis under arbitrary switching and switching with certain dwell time over finitely many positive systems. To this date, fruitful results have been obtained for instance by Gurvits et al. [2007], Mason and Shorten [2007], Blanchini et al. [2012], and Fornasini and Valcher [2012]. These results are beautifully summarized by Blanchini et al. [2015] with a plenty of stimulating practical examples. In addition, those relatively new results on the L_1/L_1 and L_∞/L_∞ induced norms for LTI positive systems by Rantzer [2015], Briat [2013], Shen and Lam [2014], Ebihara et al. [2017] are successfully extended to switched positive systems again by Blanchini et al. [2015]. In the switched case, however, there are inevitable difficulties in computing these induced norms exactly since they are characterized by infinite dimensional linear differential inequalities.

Even though the input-to-output properties of dynamical systems are usually investigated by *induced norms* and this direction has been naturally pursued in the studies of switched positive systems as briefly summarized above, there is another promising attempt to evaluate the performance deterioration caused by switching quantitatively.

Namely, Asai [2002, 2005] considered the case where a general (not necessarily positive) LTI system switches to another LTI system at the time instant zero, and introduced the *Hankel-type L_2/L_2 induced norm* as the induced norm from vector-valued L_2 -past inputs to vector valued L_2 -future outputs. Here, the past input is injected to the system before switching, driving the initial state of the system after switching to some nonzero values along with the state transition at the time instant zero, and the future output corresponds to the initial response of the system after switching. As intuitively deduced from the standard Hankel norm results summarized in Green and Limebeer [1995], this norm is readily characterized by using the controllability gramian of the system before switching and the observability gramian of the system after switching. We could say that this norm is tailored to purely evaluate the performance deterioration caused by switching.

The objective of this paper is to derive the explicit characterizations of the Hankel-type L_q/L_p induced norms of positive systems across a single switching. These norms are defined by exactly the same manner as Asai [2002, 2005], even though we evaluate the past inputs with L_p norm and the future outputs with L_q norm where p, q being 1, 2 or ∞ . This study is obviously related to the analysis of the L_q/L_p Hankel norms¹ in the standard non-

¹ Precisely speaking, in Wilson [1989] and Lu and Balas [1998], the authors discussed the $L_{q,s}/L_{p,r}$ Hankel and induced norms with the proper definition of the function space $L_{p,r}$. The L_q/L_p Hankel (induced) norm in the current paper corresponds to the special case of the $L_{q,q}/L_{p,p}$ Hankel (induced) norm studied in Wilson [1989] and Lu and Balas [1998].

switching setting dealt with by Wilson [1989] and Lu and Balas [1998]. In particular, it is worth mentioning that Lu and Balas [1998] provided closed-form formulas of the L_q/L_p Hankel norms for the case where p, q are 1, 2, or ∞ . However, there are still unavoidable difficulties in computing the L_q/L_p Hankel norms of general LTI systems if we follow Lu and Balas [1998]. The difficulties stem from the facts that (a) for the computation of the L_1/L_1 and L_∞/L_∞ Hankel norms, we unavoidably need to compute the absolute integral of impulse responses; (b) for the computation of the “norm-induced initial conditions” that are necessary in dealing with the L_1/L_2 , L_1/L_∞ , and L_2/L_∞ Hankel norms, we need to deal with implicit functions. It has been shown recently by Ebihara et al. [2020] that we can circumvent these difficulties when dealing with *externally* positive systems. It is definitely obvious that we can carry out the absolute integral of impulse responses without any ado in the case of externally positive systems. Beyond that, the main contribution of Ebihara et al. [2020] lies in that (a) they showed that the difficulties that stem from the “norm-induced initial conditions” can also be circumvented by the positivity property; (b) for the L_1/L_p and L_q/L_∞ Hankel norms with p, q being 1, 2, ∞ , they provided explicit characterizations in the form of linear program (LP) and semidefinite program (SDP).

The results in this paper can be regarded as generalization of those in Ebihara et al. [2020]. However, such generalization cannot be performed directly since the time-varying nature caused by switching makes the analysis more involved. It is also true that we have to confine ourselves to the case where the systems before and after switching are both *internally* positive to handle their state transition across switching. Nevertheless, we eventually clarify that we can explicitly characterize the Hankel-type L_q/L_p induced norms even for p, q being 1, 2, ∞ partially again thanks to the strong positivity property. In particular, we will show that some of them are given in the form of LP and SDP, the latter of which enables us to analyze the Hankel-type L_q/L_p induced norms in the case where the systems of interest are affected by parametric uncertainties.

We use the following notation. The set of $n \times m$ real matrices is denoted by $\mathbb{R}^{n \times m}$, and the set of $n \times m$ entrywise nonnegative (strictly positive) matrices is denoted by $\mathbb{R}_+^{n \times m}$ ($\mathbb{R}_{++}^{n \times m}$). For a matrix A , we also write $A \geq 0$ ($A > 0$) to denote that A is entrywise nonnegative (strictly positive). We denote by $\mathbf{1}^n \in \mathbb{R}^n$ the all-ones vector. The set of $n \times n$ Hurwitz matrices is denoted by \mathbb{H}^n , and the set of $n \times n$ Metzler matrices (real square matrices whose off-diagonal entries are nonnegative) is denoted by \mathbb{M}^n . The set of $n \times n$ real symmetric matrices is denoted by \mathbb{S}^n . For a matrix $A \in \mathbb{S}^n$, we write $A \succ 0$ ($A \prec 0$) to denote that A is positive (negative) definite. For a matrix $A \in \mathbb{S}^n$, we also denote by $\lambda_{\max}(A)$ and $d_{\max}(A)$ the maximum eigenvalue and the maximum diagonal entry of A , respectively. Finally, for $A \in \mathbb{R}^{n \times n}$, we define $\text{He}\{A\} = A + A^T$.

2. DEFINITION OF THE HANKEL-TYPE L_q/L_p INDUCED NORMS

Suppose two stable LTI systems Σ_p and Σ_f are given, which are the models of the system before and after

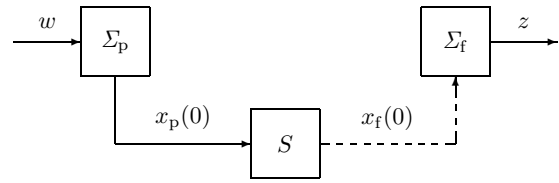


Fig. 1. Switching from Σ_p to Σ_f along with state transition.

switching at the time $t = 0$, respectively (see Fig. 1). We assume that the state space realizations of Σ_p and Σ_f are given respectively by

$$\Sigma_p : \dot{x}_p(t) = A_p x_p(t) + B_p w(t) \quad (t \leq 0), \quad (1)$$

$$\Sigma_f : \begin{cases} \dot{x}_f(t) = A_f x_f(t), \\ z(t) = C_f x_f(t) \end{cases} \quad (t \geq 0). \quad (2)$$

Here $A_p \in \mathbb{H}^{n_p}$, $B_p \in \mathbb{R}^{n_p \times n_w}$, $A_f \in \mathbb{H}^{n_f}$ and $C_f \in \mathbb{R}^{n_z \times n_f}$. The system Σ_p switches to the system Σ_f at $t = 0$ along with the state transition described by

$$x_f(0) = S x_p(0). \quad (3)$$

Here, $S \in \mathbb{R}^{n_f \times n_p}$ is a given matrix.

For the input signal w and the output signal z , we define

$$\begin{aligned} \|w\|_{1-} &:= \int_{-\infty}^0 |w(t)|_1 dt, & \|z\|_{1+} &:= \int_0^{\infty} |z(t)|_1 dt, \\ \|w\|_{2-} &:= \sqrt{\int_{-\infty}^0 |w(t)|_2^2 dt}, & \|z\|_{2+} &:= \sqrt{\int_0^{\infty} |z(t)|_2^2 dt}, \\ \|w\|_{\infty-} &:= \text{ess sup}_{-\infty < t \leq 0} |w(t)|_{\infty}, & \|z\|_{\infty+} &:= \text{ess sup}_{0 \leq t < \infty} |z(t)|_{\infty} \end{aligned}$$

where for $v \in \mathbb{R}^{n_v}$ we define

$$|v|_1 := \sum_{j=1}^{n_v} |v_j|, \quad |v|_2 := \sqrt{\sum_{j=1}^{n_v} v_j^2}, \quad |v|_{\infty} := \max_{1 \leq j \leq n_v} |v_j|.$$

For $p, q = 1, 2, \infty$ we also define

$$\begin{aligned} L_{p-} &:= \{w : \|w\|_{p-} < \infty\}, \\ L_{p-}^+ &:= \{w : w \in L_{p-}, w(t) \geq 0 \ (\forall t \leq 0)\}, \\ L_{q+} &:= \{z : \|z\|_{q+} < \infty\}, \\ L_{q+}^+ &:= \{z : z \in L_{q+}, z(t) \geq 0 \ (\forall t \geq 0)\}. \end{aligned}$$

Then, the Hankel-type L_q/L_p induced norm across switching from Σ_p to Σ_f with the state transition matrix $S \in \mathbb{R}^{n_f \times n_p}$ is defined by

$$\gamma_{q/p} := \sup_{w \in L_{p-}, \|w\|_{p-} = 1} \|z\|_{q+} \quad \text{s.t. (1), (2), (3)}. \quad (4)$$

Note that $x_p(-\infty) = 0$ is tacitly assumed. In the following, we partition $B_p \in \mathbb{R}^{n_p \times n_w}$ and $C_f \in \mathbb{R}^{n_z \times n_f}$ as follows:

$$\begin{aligned} B_p &= [B_{p,1} \ \cdots \ B_{p,n_w}] \quad (B_{p,j} \in \mathbb{R}^{n_p \times 1}, \ j = 1, \dots, n_w), \\ C_f^T &= [C_{f,1}^T \ \cdots \ C_{f,n_z}^T] \quad (C_{f,i} \in \mathbb{R}^{1 \times n_f}, \ i = 1, \dots, n_z). \end{aligned}$$

3. L_q/L_p HANKEL NORMS OF POSITIVE SYSTEMS

In this section, the definition of positive systems and the condition for LTI systems to be positive are reviewed, followed by the recent results on the L_q/L_p Hankel norms of (non-switched) positive systems by Ebihara et al. [2020].

3.1 Positive Systems

Let us consider the stable LTI system G described by

$$G : \begin{cases} \dot{x}(t) = Ax(t) + Bw(t), \\ z(t) = Cx(t) \end{cases} \quad (5)$$

where $A \in \mathbb{H}^n$, $B \in \mathbb{R}^{n \times n_w}$, $C \in \mathbb{R}^{n_z \times n}$. The impulse response g of the system G is given by

$$g(t) = \begin{cases} 0 & (t < 0), \\ C \exp(At)B & (t \geq 0). \end{cases} \quad (6)$$

The definition of the positivity of G and its characterization are given as follows.

Definition 1. (Farina and Rinaldi [2000]). The LTI system G given by (5) is called *internally* positive if its state $x(t)$ and output $z(t)$ are nonnegative for $t \geq 0$ for any nonnegative input $w(t)$ for $t \geq 0$ and nonnegative initial state $x(0)$.

Proposition 2. (Farina and Rinaldi [2000]). The system G given by (5) is internally positive if and only if

$$A \in \mathbb{M}^n, B \in \mathbb{R}_+^{n \times n_w}, C \in \mathbb{R}_+^{n_z \times n}. \quad (7)$$

Definition 3. (Farina and Rinaldi [2000]). The LTI system G given by (5) is called *externally* positive if its output $z(t)$ is nonnegative for $t \geq 0$ for any nonnegative input $w(t)$ for $t \geq 0$ and the zero initial state $x(0) = 0$.

Proposition 4. (Farina and Rinaldi [2000]). The system G given by (5) is externally positive if and only if its impulse response given by (6) is nonnegative, i.e. $g(t) \geq 0$ ($\forall t \geq 0$).

In the following, we simply use the shortcut “positive” system to denote an “internally positive” system.

3.2 L_q/L_p Hankel Norms of Positive Systems

In the case where

$$A_p = A_f = A \in \mathbb{R}^{n \times n}, B_p = B \in \mathbb{R}^{n \times n_w}, C_f = C \in \mathbb{R}^{n_z \times n}, S = I_n, \quad (8)$$

we can see that the Hankel-type L_q/L_p induced norm $\gamma_{q/p}$ defined by (4) reduces to the standard L_q/L_p Hankel norm of the system G which is denoted by $\|G\|_{q/p}$. The L_q/L_p Hankel norms of general (i.e. nonpositive) LTI systems are studied by Wilson [1989] and Lu and Balas [1998], and recently those results are refined for positive systems by Ebihara et al. [2020]. We summarize the results for positive systems in the next proposition, where $X \in \mathbb{S}^n$ and $P \in \mathbb{S}^n$ stand for the controllability and observability gramians of the system G given by (5), respectively. These are the unique solutions of the Lyapunov equations

$$AX + XA^T + BB^T = 0, \quad PA + A^T P + C^T C = 0. \quad (9)$$

Proposition 5. Let us consider the stable and positive LTI system G given by (5) and (7). Then, we have

$$\|G\|_{1/1} = |-\mathbf{1}_{n_z}^T C A^{-1} B|_\infty, \quad (10)$$

$$\|G\|_{2/1} = \sqrt{d_{\max}(B^T P B)}, \quad (11)$$

$$\|G\|_{\infty/1} = \max_{t \geq 0} \max_{i,j} |g_{i,j}(t)|, \quad (12)$$

$$\|G\|_{1/2} = \sqrt{\mathbf{1}_{n_z}^T C A^{-1} X A^{-T} C^T \mathbf{1}_{n_z}}, \quad (13)$$

$$\|G\|_{2/2} = \sqrt{\lambda_{\max}(X P)}, \quad (14)$$

$$\|G\|_{\infty/2} = \sqrt{d_{\max}(C X C^T)}, \quad (15)$$

$$\|G\|_{1/\infty} = \mathbf{1}_{n_z}^T C A^{-2} B \mathbf{1}_{n_w}, \quad (16)$$

$$\|G\|_{2/\infty} = \sqrt{\mathbf{1}_{n_w}^T B^T A^{-T} P A^{-1} B \mathbf{1}_{n_w}}, \quad (17)$$

$$\|G\|_{\infty/\infty} = | -C A^{-1} B \mathbf{1}_{n_w} |_\infty. \quad (18)$$

The well known characterizations (12) and (14) as well as (11) and (15) shown in Wilson [1989] are valid even for general LTI systems. The characterizations (10) and (18) are shown by Ebihara et al. [2020] on the basis of fundamental results shown in Desoer and Vidyasagar [1975]. These are valid even for *externally* positive systems. The rest characterizations, (13), (16) and (17), are shown by Ebihara et al. [2020] where the treatment of implicit functions needed for the computation of “norm-induced initial conditions” in Lu and Balas [1998] for general system case is successfully circumvented by strong positivity property. Again, (13), (16) and (17) are valid even for *externally* positive systems. Finally, from Lu and Balas [1998], we see that the L_q/L_p Hankel norm is identical to the corresponding L_q/L_p induced norm for the cases where $(q, p) \in \{(1, 1), (2, 1), (\infty, 1), (\infty, 2), (\infty, \infty)\}$.

4. THE HANKEL-TYPE L_q/L_p INDUCED NORMS

4.1 Preliminary Results

In considering the Hankel-type L_q/L_p induced norm $\gamma_{q/p}$ for the positive system switching, the underlying assumptions will be used:

- (i) Both systems Σ_p and Σ_f are stable and positive, i.e.

$$A_p \in \mathbb{H}^{n_p} \cap \mathbb{M}^{n_p}, B_p \in \mathbb{R}_+^{n_p \times n_w}, A_f \in \mathbb{H}^{n_f} \cap \mathbb{M}^{n_f}, C_f \in \mathbb{R}_+^{n_z \times n_f}. \quad (19)$$

- (ii) The matrix S in (3) is nonnegative, i.e.

$$S \in \mathbb{R}_+^{n_f \times n_p}. \quad (20)$$

The assumption (20) implies that the positivity of the “future” state x_f is inherited from the one of the “past” state x_p . The next lemmas play a key role in analyzing the Hankel-type L_q/L_p induced norm $\gamma_{q/p}$ for the positive system switching.

Lemma 6. For the positive system switching from Σ_p to Σ_f described by (1), (2), (3), (19), and (20), suppose an input $w \in L_{p-}$ yields an output $z \in L_{q+}$ where p, q being 1, 2, ∞ . Define the input associated to $w \in L_{p-}$ by $\hat{w} \in L_{p-}^+$ such that $\hat{w}_j(t) := |w_j(t)|$ ($t \leq 0, j = 1, \dots, n_w$). Then, the output $\hat{z} \in L_{q+}$ corresponding to the input $\hat{w} \in L_{p-}^+$ satisfies $\hat{z}_i(t) \geq |z_i(t)|$ ($\forall t \geq 0, i = 1, \dots, n_z$).

Lemma 7. For the positive system switching from Σ_p to Σ_f , suppose there exists an input $w \in L_{p-}$ with $\|w\|_{p-} = 1$ such that the corresponding output $z \in L_{q+}$ satisfies $\|z\|_{q+} = \gamma$ for a given $\gamma > 0$. Then, there exists an input $\hat{w} \in L_{p-}^+$ with $\|\hat{w}\|_{p-} = 1$ such that the corresponding output $\hat{z} \in L_{q+}$ satisfies $\|\hat{z}\|_{q+} \geq \gamma$.

Lemma 8. For the positive system switching from Σ_p to Σ_f , suppose inputs $w_1, w_2 \in L_{p-}^+$ yield outputs $z_1, z_2 \in L_{q+}^+$, respectively. Then, if $w_1(t) \geq w_2(t)$ ($\forall t \leq 0$), we have $\|z_1\|_{q+} \geq \|z_2\|_{q+}$.

Let us denote by Σ the linear operator from $w \in L_{p-}$ to $z \in L_{q+}$. Namely,

$$\Sigma: L_{p-} \ni w \mapsto z \in L_{q+},$$

$$(\Sigma w)(t) = C_f \exp(A_f t) S \int_{-\infty}^0 \exp(A_p(-\tau)) B_p w(\tau) d\tau = z(t) \quad (t \geq 0). \quad (21)$$

Then, Σ is positive in the sense that $(\Sigma w)(t) \geq 0$ ($\forall t \geq 0$) holds for $w \in L_{p-}^+$. The above lemmas follow from this basic fact. In the following, we denote by $X_p \in \mathbb{S}^{n_p}$ and $P_f \in \mathbb{S}^{n_f}$ the controllability gramian of Σ_p and the observability gramian of Σ_f , respectively.

4.2 The Hankel-type induced norms $\gamma_{q/p}$ with $p = \infty$

In the case where we consider the Hankel-type induced norm $\gamma_{q/p}$ with $p = \infty$, we can readily see from Lemmas 6-8 that the next strong result holds.

Lemma 9. For the positive system switching from Σ_p to Σ_f described by (1), (2), (3), (19), and (20), the Hankel-type induced norms $\gamma_{q/\infty}$ with q being 1, 2, ∞ are attained by the input $w^* \in L_{\infty-}^+$ given by $w^*(t) = \mathbf{1}_{n_w}$ ($\forall t \leq 0$). This input leads to the initial condition before switching $x_p(0) = -A_p^{-1}B_p\mathbf{1}_{n_w} \in \mathbb{R}_+^{n_p}$ and the initial condition after switching $x_f(0) = -SA_p^{-1}B_p\mathbf{1}_{n_w} \in \mathbb{R}_+^{n_f}$.

From this lemma we can obtain the next theorem.

Theorem 10. For the positive system switching from Σ_p to Σ_f described by (1), (2), (3), (19), and (20), we have

$$\gamma_{1/\infty} = \mathbf{1}_{n_z}^T C_f A_f^{-1} S A_p^{-1} B_p \mathbf{1}_{n_w}, \quad (22)$$

$$\gamma_{2/\infty} = \sqrt{\mathbf{1}_{n_w}^T B_p^T A_p^{-T} S^T P_f S A_p^{-1} B_p \mathbf{1}_{n_w}}, \quad (23)$$

$$\gamma_{\infty/\infty} = \max_{t_f \geq 0} | -C_f \exp(A_f t_f) S A_p^{-1} B_p \mathbf{1}_{n_w} |_{\infty}. \quad (24)$$

Moreover, the following conditions (a-i)-(a-v) are equivalent for a given $\gamma > 0$, and similarly for (b-i) and (b-ii).

(a-i) $\gamma_{1/\infty} < \gamma$.

(a-ii) There exists $F \in \mathbb{R}^{(n_p+n_f) \times (n_p+n_f+1)}$ such that

$$\begin{bmatrix} -2\gamma & 0 & \mathbf{1}_{n_w}^T B_p^T \\ 0 & 0_{n_f} & 0 \\ B_p \mathbf{1}_{n_w} & 0 & 0_{n_p} \end{bmatrix} + \text{He} \left\{ \begin{bmatrix} \mathbf{1}_{n_z}^T C_f & 0 \\ \hat{A}_f & S \\ 0 & A_p \end{bmatrix} F \right\} < 0. \quad (25)$$

(a-iii) There exists $H \in \mathbb{R}^{(n_p+n_f) \times (n_p+n_f+1)}$ such that

$$\begin{bmatrix} -2\gamma & 0 & \mathbf{1}_{n_z}^T C_f \\ 0 & 0_{n_p} & 0 \\ C_f^T \mathbf{1}_{n_z} & 0 & 0_{n_f} \end{bmatrix} + \text{He} \left\{ \begin{bmatrix} \mathbf{1}_{n_w}^T B_p^T & 0 \\ A_p^T & S^T \\ 0 & A_f^T \end{bmatrix} H \right\} < 0. \quad (26)$$

(a-iv) There exist $f_p \in \mathbb{R}_{++}^{n_p}$, $f_0 \in \mathbb{R}_{++}^{n_f}$, and $f_f \in \mathbb{R}_{++}^{n_f}$ such that $A_p f_p + B_p \mathbf{1}_{n_w} < 0$, $S f_p < f_0$, $A_f f_f + f_0 < 0$, $\mathbf{1}_{n_z}^T C_f f_f < \gamma$.

(a-v) There exist $h_f \in \mathbb{R}_{++}^{n_f}$, $h_0 \in \mathbb{R}_{++}^{n_p}$, and $h_p \in \mathbb{R}_{++}^{n_p}$ such that $h_f^T A_f + \mathbf{1}_{n_z}^T C_f < 0$, $h_f^T S < h_0^T$, $h_p^T A_p + h_0^T < 0$, $h_p^T B_p \mathbf{1}_{n_w} < \gamma$.

(b-i) $\gamma_{2/\infty} < \gamma$.

(b-ii) There exist $Q_f \in \mathbb{S}_{++}^{n_f}$, $F_1 \in \mathbb{R}^{(n_p+n_f) \times (n_p+n_f+1)}$ and $F_2 \in \mathbb{R}^{n_f \times 2n_f}$ such that

$$\begin{bmatrix} -\gamma^2 & 0 \\ 0 & 0_{n_p} & 0 \\ 0 & 0 & Q_f \end{bmatrix} + \text{He} \left\{ \begin{bmatrix} \mathbf{1}_{n_w}^T B_p^T & 0 \\ A_p^T & S^T \\ 0 & I_{n_f} \end{bmatrix} F_1 \right\} < 0, \quad (27)$$

$$\begin{bmatrix} C_f^T C_f & Q_f \\ Q_f & 0 \end{bmatrix} + \text{He} \left\{ \begin{bmatrix} A_f^T \\ -I_{n_f} \end{bmatrix} F_2 \right\} < 0.$$

Remark 11.

(i) It is clear that (22) and (23) reduce to (16) and (17), respectively, in the case of (8). On the other hand, (24) looks much more complicated than (18), and we see that (18) can be obtained by assuming (8) and

the maximum in (24) is attained at $t_f = 0$. In the time-invariant case (8), it is allowed to consider the “shift” of input signal w due to the time-invariant nature of the system and this intuitively explains the reason why the maximum is attained at $t_f = 0$. More rigorously, in the case where (8) holds in (24), we see

$$\frac{d}{dt_f} (-C \exp(A t_f) A^{-1} B \mathbf{1}_{n_w}) = -C \exp(A t_f) B \mathbf{1}_{n_w} \leq 0$$

and hence the maximum is actually attained at $t_f = 0$. However, in the switching case, the intrinsic time-varying nature of the system does not allow us to conclude in such a way and we have to take the maximum over $t_f \geq 0$ as in (24).

(ii) The LMI-based characterizations (25), (26), and (27) are useful in analyzing the Hankel-type induced norm $\gamma_{q/p}$ where the positive systems Σ_p and Σ_f as well as the matrix S are affected by parametric uncertainties. See Section 5 for concrete examples.

4.3 The Hankel-type induced norms $\gamma_{q/p}$ with $q = 1$

When considering $\gamma_{q/p}$ for the positive system switching, we can confine ourselves to nonnegative input signals from Lemma 7. This leads to $x_p(0) \in \mathbb{R}_+^{n_p}$, $x_f(0) = S x_p(0) \in \mathbb{R}_+^{n_f}$, and hence $z(t) = C_f \exp(A_f t) S x_p(0) \in \mathbb{R}_+^{n_z}$ ($\forall t \geq 0$) holds. It follows that $\|z\|_{1+} = -\mathbf{1}_{n_z}^T C_f A_f^{-1} S x_p(0)$. Namely, we can characterize $\gamma_{1/p}$ as follows:

$$\gamma_{1/p} = \sup_{w \in L_{p-}^+, \|w\|_{p-}=1} -\mathbf{1}_{n_z}^T C_f A_f^{-1} S \int_{-\infty}^0 \exp(-A_p \tau) B_p w(\tau) d\tau.$$

From this expression, we can see that $\gamma_{1/p}$ is identical to the L_{∞}/L_p Hankel norm $\|\hat{G}\|_{\infty/p}$ of the single-output, stable and positive LTI system \hat{G} given by

$$\hat{G}(s) := \left[\begin{array}{c|c} A_p & B_p \\ \hline -\mathbf{1}_{n_z}^T C_f A_f^{-1} S & 0 \end{array} \right].$$

From this key observation and Proposition 5, we can obtain the next theorem.

Theorem 12. For the positive system switching from Σ_p to Σ_f described by (1), (2), (3), (19), and (20), we have

$$\gamma_{1/1} = \max_{t_p \geq 0} | -\mathbf{1}_{n_z}^T C_f A_f^{-1} S \exp(A_p t_p) B_p |_{\infty}, \quad (28)$$

$$\gamma_{1/2} = \sqrt{\mathbf{1}_{n_z}^T C_f A_f^{-1} S X_p S^T A_f^{-T} C_f^T \mathbf{1}_{n_z}}. \quad (29)$$

Moreover, the following conditions (c-i) and (c-ii) are equivalent for a given $\gamma > 0$.

(c-i) $\gamma_{1/2} < \gamma$.

(c-ii) There exist $Y_p \in \mathbb{S}_{++}^{n_p}$, $F_1 \in \mathbb{R}^{(n_f+n_p) \times (n_f+n_p+1)}$ and $F_2 \in \mathbb{R}^{n_p \times 2n_p}$ such that

$$\begin{bmatrix} -\gamma^2 & 0 & 0 \\ 0 & 0_{n_p} & 0 \\ 0 & 0 & Y_p \end{bmatrix} + \text{He} \left\{ \begin{bmatrix} \mathbf{1}_{n_z}^T C_f & 0 \\ \hat{A}_f & S \\ 0 & I_{n_p} \end{bmatrix} F_1 \right\} < 0, \quad (30)$$

$$\begin{bmatrix} B_p B_p^T & Y_p \\ Y_p & 0 \end{bmatrix} + \text{He} \left\{ \begin{bmatrix} A_p \\ -I_{n_p} \end{bmatrix} F_2 \right\} < 0.$$

Remark 13.

(i) We can see that (29) reduces to (13) in the case of (8). On the other hand, we see that (28) can be reduced to (10) by assuming (8) and the maximum in (28) is

attained at $t_p = 0$. In fact, in the case where (8) holds in (28), we see that

$$\frac{d}{dt_p}(-\mathbf{1}_{n_z}^T C A^{-1} \exp(At_p) B) = -\mathbf{1}_{n_z}^T C \exp(At_p) B \leq 0$$

and hence the maximum is actually attained at $t_p = 0$.

(ii) The worst case input $w^* \in L_{2-}$ that attains (29) can be given explicitly by

$$w^*(t) = -\frac{B_p^T \exp(-A_p^T t) S^T A_f^{-T} C_f^T \mathbf{1}_{n_z}}{\sqrt{\mathbf{1}_{n_z}^T C_f A_f^{-1} S X_p S^T A_f^{-T} C_f^T \mathbf{1}_{n_z}}} (t \leq 0).$$

(iii) Obviously, the duality holds between $\gamma_{2/\infty}$ given by (23) and $\gamma_{1/2}$ given by (29). Namely, we see that the Hankel-type L_2/L_∞ induced norm on the positive system switching from Σ_p to Σ_f via $S \in \mathbb{R}_+^{n_f \times n_p}$ is equivalent to the Hankel-type L_1/L_2 induced norm on the positive system switching from $\tilde{\Sigma}_f$ to $\tilde{\Sigma}_p$ via $S^T \in \mathbb{R}_+^{n_p \times n_f}$ where

$$\begin{aligned} \tilde{\Sigma}_f : \dot{\xi}_p(t) &= A_f^T \xi_p(t) + C_f^T \tilde{w}(t) \quad (t \leq 0), \\ \tilde{\Sigma}_p : \begin{cases} \xi_f(t) &= A_p^T \xi_f(t), \\ \tilde{z}(t) &= B_p^T \xi_f(t) \end{cases} \quad (t \geq 0). \end{aligned}$$

4.4 The Hankel-type induced norms $\gamma_{\infty/1}$, $\gamma_{\infty/2}$, $\gamma_{2/1}$, $\gamma_{2/2}$

In this section, explicit characterizations of $\gamma_{\infty/1}$, $\gamma_{\infty/2}$, $\gamma_{2/1}$, and $\gamma_{2/2}$ are given. The results in this subsection can be derived without relying on the positivity and hence they are valid even for general switching cases.

Characterization of $\gamma_{\infty/1}$ and $\gamma_{\infty/2}$ For the characterization of $\gamma_{\infty/p}$ ($p = 1, 2$), for each $t_f \geq 0$, let us define

$$\nu_{\infty/p}(t_f) := \sup_{w \in L_{p-}, \|w\|_{p-}=1} \|z(t_f)\|_\infty \text{ s.t. (1), (2), (3)}. \quad (31)$$

Then, we have

$$\gamma_{\infty/p} = \max_{t_f \geq 0} \nu_{\infty/p}(t_f). \quad (32)$$

On the other hand, in view of the fact that $z(t)$ ($t \geq 0$) can be written explicitly as (21), let us define for each $t_f \geq 0$ the LTI positive system \hat{F}_{t_f} by

$$\hat{F}_{t_f}(s) := \left[\frac{A_p}{C_f \exp(A_f t_f) S} \middle| \frac{B_p}{0} \right] (t_f \geq 0). \quad (33)$$

Then, it may be deduced from (12), (15), (21), (31) and (33) that

$$\begin{aligned} \nu_{\infty/1}(t_f) &= \|\hat{F}_{t_f}\|_{\infty/1} \\ &= \max_{t_p \geq 0} \max_{i,j} |C_{f,i} \exp(A_f t) S \exp(A_p t_p) B_{p,j}|, \end{aligned} \quad (34)$$

$$\begin{aligned} \nu_{\infty/2}(t_f) &= \|\hat{F}_{t_f}\|_{\infty/2} \\ &= \sqrt{d_{\max}(C_f \exp(A_f t_f) S X_p S^T \exp(A_f^T t_f) C_f^T)}. \end{aligned} \quad (35)$$

It follows from (32), (34), (35) that the next results hold.

Theorem 14. For the system switching from Σ_p to Σ_f described by (1), (2), and (3), we have

$$\begin{aligned} \gamma_{\infty/1} &= \max_{t_f \geq 0} \max_{t_p \geq 0} \max_{i,j} |C_{f,i} \exp(A_f t) S \exp(A_p t_p) B_{p,j}|, \\ \gamma_{\infty/2} &= \max_{t_f \geq 0} \sqrt{d_{\max}(C_f \exp(A_f t_f) S X_p S^T \exp(A_f^T t_f) C_f^T)}. \end{aligned}$$

Characterization of $\gamma_{2/1}$ We next consider the characterization of $\gamma_{2/1}$. To this end, we recall the next lemma from Chellaboina et al. [1999]. In the following, we define

$$\|z\|_{(\infty,2)_+} := \text{ess sup}_{0 \leq t < \infty} |z(t)|_2, \quad L_{(\infty,2)_+} := \{z : \|z\|_{(\infty,2)_+} < \infty\}.$$

Lemma 15. (Chellaboina et al. [1999]). Let us consider the stable LTI system G given by (5) with $x(0) = 0$ and define its induced norm $\|G\|_{(\infty,2)/1}^{\text{ind}}$ from $w \in L_{1+}$ to $z \in L_{(\infty,2)_+}$ by $\|G\|_{(\infty,2)/1}^{\text{ind}} := \sup_{w \in L_{1+}, \|w\|_{1+}=1} \|z\|_{(\infty,2)_+}$. Then, we have

$$\|G\|_{(\infty,2)/1}^{\text{ind}} = \max_{t \geq 0} \sqrt{d_{\max}(B^T \exp(A^T t) C^T C \exp(At) B)}.$$

We now go back to the analysis of $\gamma_{2/1}$. If we define

$\hat{C}_f := P_f^{1/2} S \in \mathbb{R}^{n_f \times n_p}$, we can see from (21) that

$$\begin{aligned} \gamma_{2/1} &= \sup_{w \in L_{1-}, \|w\|_{1-}=1} \left| \hat{C}_f \int_{-\infty}^0 \exp(A_p(-\tau)) B_p w(\tau) d\tau \right|_2 \\ &= \sup_{w \in L_{1+}, \|w\|_{1+}=1} \left| \hat{C}_f \int_0^{\infty} \exp(A_p(\tau)) B_p w(\tau) d\tau \right|_2 \\ &= \|\hat{H}\|_{(\infty,2)/1}^{\text{ind}} \end{aligned}$$

where

$$\hat{H}(s) := \left[\frac{A_p}{\hat{C}_f} \middle| \frac{B_p}{0} \right].$$

From this key observation and Lemma 15, the next theorem follows.

Theorem 16. For the system switching from Σ_p to Σ_f described by (1), (2), and (3), we have

$$\gamma_{2/1} = \max_{t_p \geq 0} \sqrt{d_{\max}(B_p^T \exp(A_p^T t_p) S^T P_f S \exp(A_p t_p) B_p)}.$$

Characterization of $\gamma_{2/2}$ We finally note from Asai [2005] that $\gamma_{2/2}$ is given by $\gamma_{2/2} = \sqrt{\lambda_{\max}(S^T P_f S X_p)}$.

5. NUMERICAL EXAMPLES

5.1 Problem Setting

Let us consider the case where the systems Σ_p , Σ_f , and the matrix S in (1), (2), and (3), respectively, are affected by polytopic-type uncertainty of the form

$$\begin{aligned} \left[\begin{array}{ccc} C_f & 0 & 0 \\ A_f & S & 0 \\ 0 & A_p & B_p \end{array} \right] \in \left\{ \sum_{l=1}^N \alpha_l \left[\begin{array}{ccc} C_f^{[l]} & 0 & 0 \\ A_f^{[l]} & S^{[l]} & 0 \\ 0 & A_p^{[l]} & B_p^{[l]} \end{array} \right] : \alpha \in \alpha_p \right\}, \\ \alpha_p = \left\{ \alpha \in \mathbb{R}_+^N : \sum_{l=1}^N \alpha_l = 1 \right\}. \end{aligned}$$

Here, we assume that the given matrices $A_p^{[l]}$, $B_p^{[l]}$, $A_f^{[l]}$, $C_f^{[l]}$, and $S^{[l]}$ ($l = 1, \dots, N$) that define the vertices of the polytope satisfy $A_p^{[l]} \in \mathbb{M}^{n_p}$, $B_p^{[l]} \in \mathbb{R}_+^{n_p \times n_w}$, $A_f^{[l]} \in \mathbb{M}^{n_f}$, $C_f^{[l]} \in \mathbb{R}_+^{n_z \times n_f}$, and $S^{[l]} \in \mathbb{R}_+^{n_f \times n_p}$. In the following, we denote by $\Sigma_{p,\alpha}$, $\Sigma_{f,\alpha}$, and S_α the positive systems and the nonnegative matrix corresponding to the parameter $\alpha \in \alpha_p$. We assume that both $\Sigma_{p,\alpha}$ and $\Sigma_{f,\alpha}$ are stable for any $\alpha \in \alpha_p$. Under these assumptions, we denote by $\gamma_{q/p}(\alpha)$ the Hankel-type L_q/L_p induced norm on the positive system switching from $\Sigma_{p,\alpha}$ to $\Sigma_{f,\alpha}$ via S_α .

The problem we consider in this section is to compute the worst case Hankel-type L_q/L_p induced norm $\gamma_{q/p}^*$ defined by $\gamma_{q/p}^* := \max_{\alpha \in \alpha_P} \gamma_{q/p}(\alpha)$. Even though exact and efficient computation of $\gamma_{q/p}^*$ is hard, we can compute its upper bound efficiently by using the SDP characterizations provided in the preceding section. For instance, we consider the analysis of $\gamma_{1/\infty}^*$ in the next subsection.

5.2 Computation Results for $\gamma_{1/\infty}^*$

From (25) and (26), it may be seen that we can obtain upper bounds of $\gamma_{1/\infty}^*$ by solving the following SDPs.

$$\bar{\gamma}_{1/\infty}^{*p} := \inf_{\gamma, F} \gamma \quad \text{subject to}$$

$$\begin{bmatrix} -2\gamma & 0 & \mathbf{1}_{n_w}^T B_p^{[l]T} \\ 0 & 0 & 0 \\ B_p^{[l]} \mathbf{1}_{n_w} & 0 & 0 \end{bmatrix} + \text{He} \left\{ \begin{bmatrix} \mathbf{1}_{n_z}^T C_f^{[l]} & 0 \\ A_f^{[l]} & S^{[l]} \\ 0 & A_p^{[l]} \end{bmatrix} F \right\} \prec 0 \quad (36)$$

($l = 1, \dots, N$).

$$\bar{\gamma}_{1/\infty}^{*d} := \inf_{\gamma, H} \gamma \quad \text{subject to}$$

$$\begin{bmatrix} -2\gamma & 0 & \mathbf{1}_{n_w}^T C_f^{[l]} \\ 0 & 0 & 0 \\ C_f^{[l]T} \mathbf{1}_{n_z} & 0 & 0 \end{bmatrix} + \text{He} \left\{ \begin{bmatrix} \mathbf{1}_{n_w}^T B_p^{[l]T} & 0 \\ A_p^{[l]T} & S^{[l]T} \\ 0 & A_f^{[l]T} \end{bmatrix} H \right\} \prec 0 \quad (37)$$

($l = 1, \dots, N$).

As a concrete example, let us consider the case where $N = 2$ and

$$\begin{bmatrix} C_f^{[1]} & 0 & 0 \\ A_f^{[1]} & S^{[1]} & 0 \\ 0 & A_p^{[1]} & B_p^{[1]} \end{bmatrix} = \begin{bmatrix} 0.98 & 0.29 & 0 & 0 & 0 \\ -1.27 & -0.30 & 0.80 & 0.60 & 0 \\ 0.56 & -0.36 & 0.90 & 0.88 & 0 \\ 0 & 0 & -0.91 & 0.79 & 0.67 \\ 0 & 0 & 0.36 & -0.60 & 0.13 \end{bmatrix},$$

$$\begin{bmatrix} C_f^{[2]} & 0 & 0 \\ A_f^{[2]} & S^{[2]} & 0 \\ 0 & A_p^{[2]} & B_p^{[2]} \end{bmatrix} = \begin{bmatrix} 0.83 & 0.85 & 0 & 0 & 0 \\ -0.81 & 0.37 & 0.37 & 0.87 & 0 \\ 0.52 & -0.52 & 0.59 & 0.93 & 0 \\ 0 & 0 & -0.68 & 0.73 & 0.03 \\ 0 & 0 & 0.55 & -1.04 & 0.45 \end{bmatrix}.$$

From (22), we find on the two vertices that $\gamma_{1/\infty}(e_1) = 10.9644$ and $\gamma_{1/\infty}(e_2) = 12.4567$. We then next solve the SDPs (36) and (37) to evaluate the worst case Hankel-type L_1/L_∞ induced norm $\gamma_{1/\infty}^*$. It turns out that $\bar{\gamma}_{1/\infty}^{*p} = \bar{\gamma}_{1/\infty}^{*d} = 12.7535$. On the other hand, by a brute force gridding search, we confirm that $\gamma_{1/\infty}^* \approx 12.7535$ and this is attained by $\alpha = [0.2799 \ 0.7201]^T$. Namely, in this particular example, the result obtained from the SDPs (36) and (37) is numerically verified to be exact. We can also confirm the exactness of the result obtained by the SDPs (36) and (37) by duality-based arguments, see Lemma 3.5 of Ebihara et al. [2015] for details.

6. CONCLUSION

In this paper, we analyzed the Hankel-type L_q/L_p induced norms across a single switching over two LTI positive systems. We derived explicit representations of the Hankel-type L_q/L_p induced norms for p, q being $1, 2, \infty$, where those new results for $(q, p) = \{(\infty, 1), (\infty, 2), (2, 1)\}$ are valid even for general (nonpositive) switching cases. In particular, for $(q, p) = \{(1, \infty), (2, \infty), (1, 2)\}$, we provided LP- and SDP-based characterizations. By numerical examples, we illustrated the usefulness of the SDP-based characterizations for the analysis of the Hankel-type L_q/L_p induced norms where the systems of interest are affected by parametric uncertainties.

REFERENCES

- Asai, T. (2002). Analysis of the worst-case bumpy responses based on lmis. In *Proc. Conference on Decision and Control*, 656–661.
- Asai, T. (2005). Necessary and sufficient conditions for analysis of L_2 gain across switching. *Transactions of the SICE*, 41(5), 437–443 (in Japanese).
- Blanchini, F., Colaneri, P., and Valcher, M.E. (2012). Co-positive Lyapunov functions for the stabilization of positive switched systems. *IEEE Transactions on Automatic Control*, 57(12), 3038–3050.
- Blanchini, F., Colaneri, P., and Valcher, M.E. (2015). Switched positive linear systems. *Foundations and Trends[®] in Systems and Control*, 2(2), 101–273.
- Briat, C. (2013). Robust stability and stabilization of uncertain linear positive systems via integral linear constraints: L_1 -gain and L_∞ -gain characterization. *International Journal of Robust and Nonlinear Control*, 23(17), 1932–1954.
- Chellaboina, V.S., Haddad, W.M., Bernstein, D.S., and Wilson, D.A. (1999). Induced convolution operator norms of linear dynamical systems. In *Proc. American Control Conference*, 3805–3809.
- Desoer, C.A. and Vidyasagar, M. (1975). *Feedback Systems: Input-Output Properties*. Academic Press, New York.
- Ebihara, Y., Peaucelle, D., and Arzelier, D. (2015). *S-Variable Approach to LMI-Based Robust Control*. Springer, London.
- Ebihara, Y., Peaucelle, D., and Arzelier, D. (2017). Analysis and synthesis of interconnected positive systems. *IEEE Transactions on Automatic Control*, 62(2), 652–667.
- Ebihara, Y., Zhu, B., and Lam, J. (2020). The L_q/L_p Hankel norms of positive systems. *IEEE Control Systems Letters*, 4(2), 462–467.
- Farina, L. and Rinaldi, S. (2000). *Positive Linear Systems: Theory and Applications*. John Wiley and Sons, Inc.
- Fornasini, E. and Valcher, M.E. (2012). Stability and stabilizability criteria for discrete-time positive switched systems. *IEEE Transaction on Automatic Control*, 57(5), 1208–1221.
- Green, M. and Limebeer, D. (1995). *Linear Robust Control*. Prentice-Hall.
- Gurvits, L., Shorten, R., and Mason, O. (2007). On the stability of switched positive linear systems. *IEEE Transactions on Automatic Control*, 52(6), 1099–1103.
- Lu, W.W. and Balas, G.J. (1998). A comparison between Hankel norms and induced norms. *IEEE Transactions on Automatic Control*, 43(11), 1658–1662.
- Mason, O. and Shorten, R. (2007). On linear copositive Lyapunov function and the stability of switched positive linear systems. *IEEE Transactions on Automatic Control*, 52(7), 1346–1349.
- Rantzer, A. (2015). Scalable control of positive systems. *European Journal of Control*, 24(1), 72–80.
- Shen, J. and Lam, J. (2014). L_∞ -gain analysis for positive systems with distributed delays. *Automatica*, 50(2), 547–551.
- Wilson, D.A. (1989). Convolution and Hankel operator norms for linear systems. *IEEE Transactions on Automatic Control*, 34(1), 94–97.